




28F6820  
ROD (1 REQ)

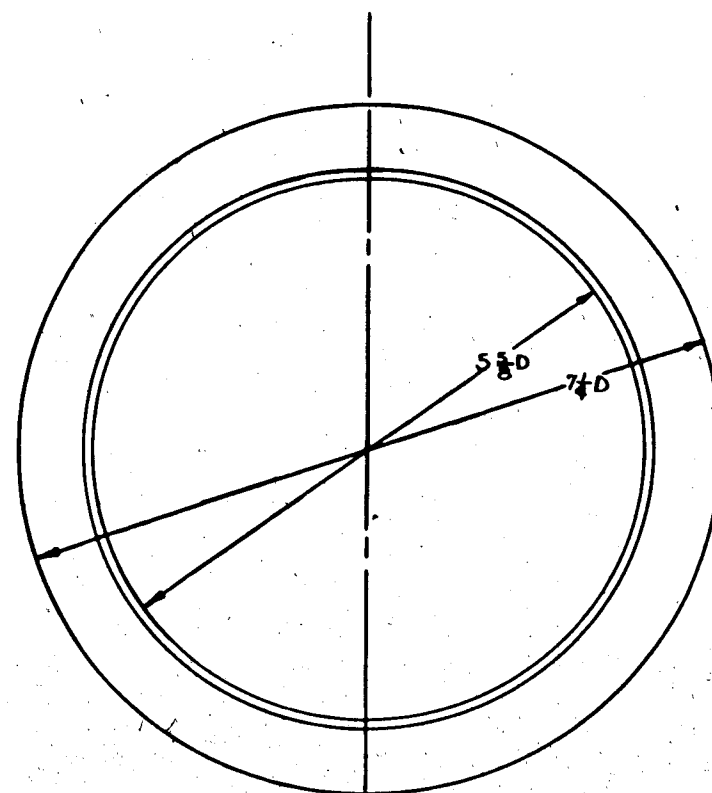

DETAIL OF - 7

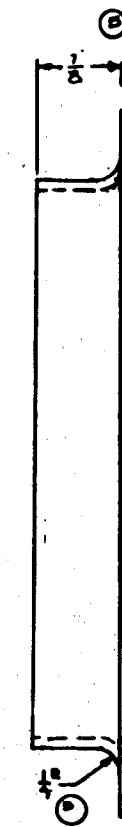

REV	DESCRIPTION	DATE	BY	CHK	APPROVED	DATE	BY
1	ORIGINAL						
2	REVISION						
3	REVISION						
4	REVISION						
5	REVISION						
6	REVISION						
7	REVISION						
8	REVISION						
9	REVISION						
10	REVISION						
11	REVISION						
12	REVISION						
13	REVISION						
14	REVISION						
15	REVISION						
16	REVISION						
17	REVISION						
18	REVISION						
19	REVISION						
20	REVISION						

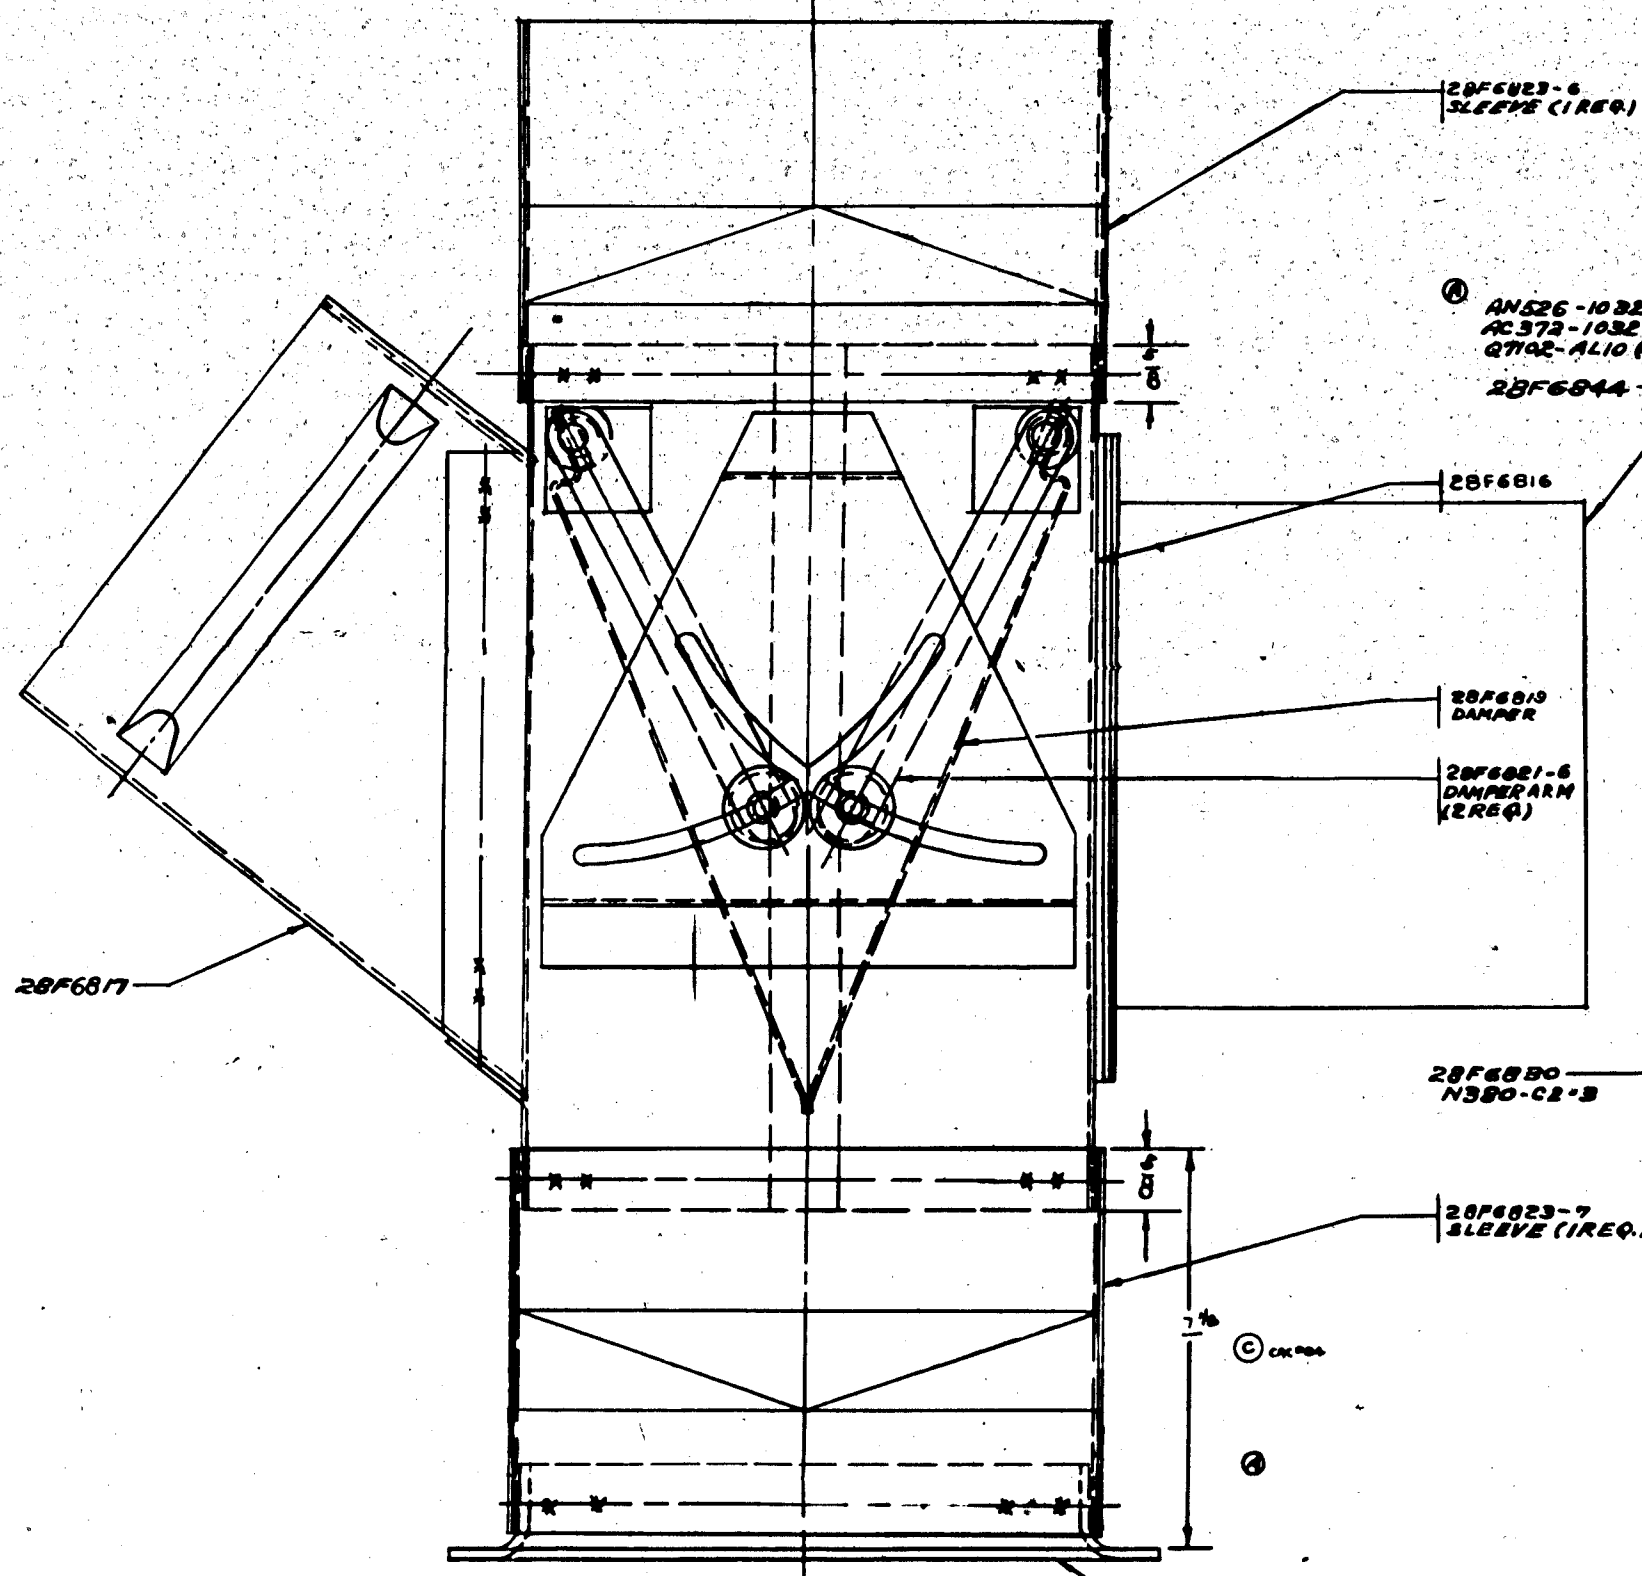

28F6823-6  
SLEEVE (1 REQ)

AN325-1032-16 (2 REQ)  
AC372-1032 (2 REQ)  
Q702-AL10 (6 REQ)

28F6844

28F6816


28F6813  
DAMPER

28F6821-6  
DAMPER ARM  
(2 REQ)

28F6830  
N380-C1-B

28F6823-7  
SLEEVE (1 REQ)

CHG 100

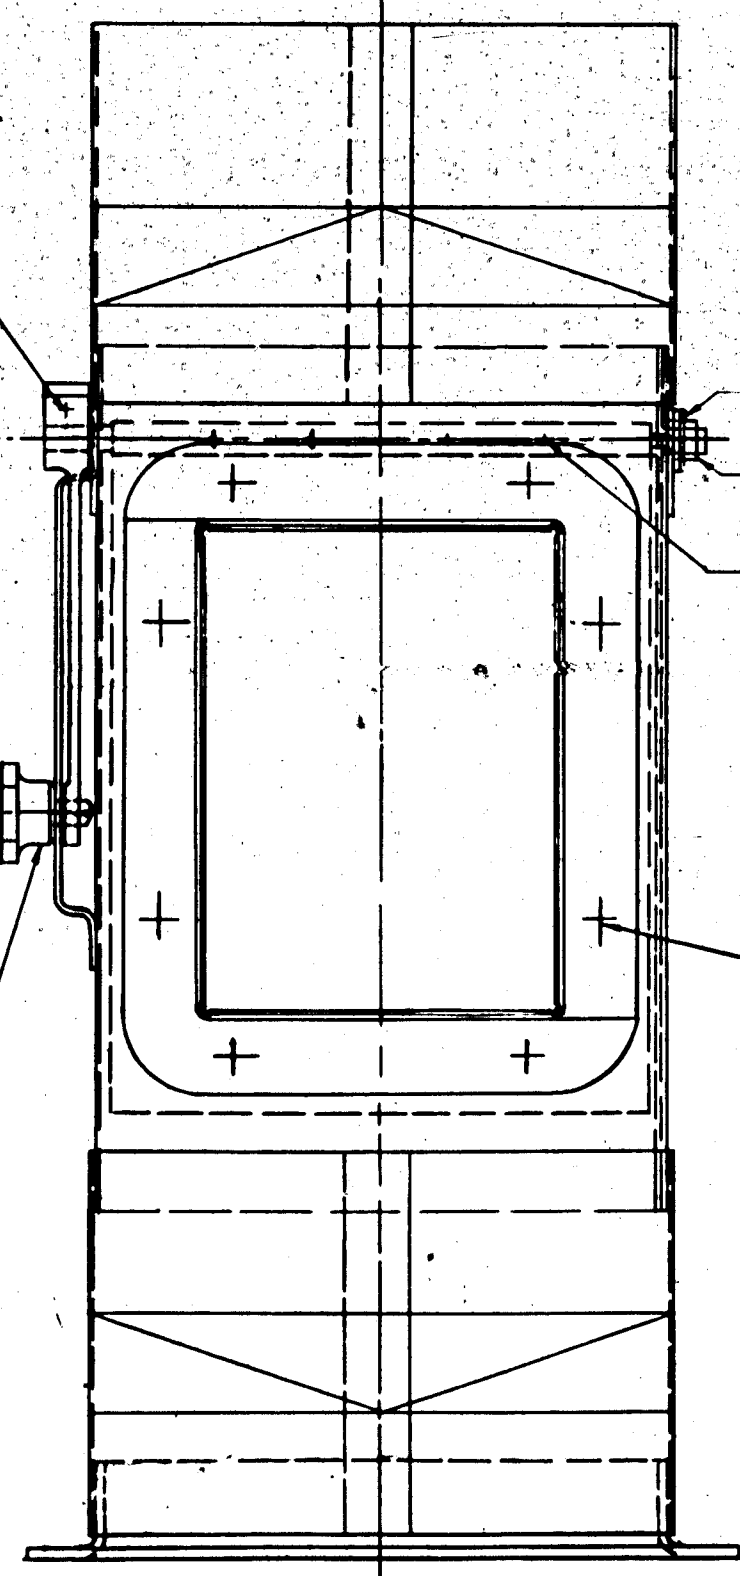

AN380-C1-3 CUTTER PIN  
(2 REQ)

28F6822  
RETAINING COLLAR  
(2 REQ)

AN3-04A BOLT  
AC372 DIODE  
(4 EACH REQ) NUT

AN3-04A  
AC372 DIODE  
(8 PLACES)

\* SPOTWELDING SYMBOL  
THIS SYMBOL INDICATES SPOTWELDING  
RYETS ARE NOT INDICATED ON THIS  
DRAWING BY SYMBOLS.

REV	DESCRIPTION	DATE	BY	CHK	APPROVED	DATE	BY
1	ORIGINAL						
2	REVISION						
3	REVISION						
4	REVISION						
5	REVISION						
6	REVISION						
7	REVISION						
8	REVISION						
9	REVISION						
10	REVISION						
11	REVISION						
12	REVISION						
13	REVISION						
14	REVISION						
15	REVISION						
16	REVISION						
17	REVISION						
18	REVISION						
19	REVISION						
20	REVISION						

H 396

28F6815